

Crystal Part No.: RFX-11-36.0M30IL

Issue 2; 17th November 2022

Features

- Frequency 36.0MHz fundamental
- Calibration tolerance ± 10 ppm
- Temperature stability ± 20 ppm
- Temperature range (-40 to +85) $^{\circ}$ C
- The flexible nature of the design, means that variations to suit almost any application can be developed to meet individual customer requirements
- Drive level 100mW
- Series Resistance 100 Ω
- Shunt capacitance C_0 3.0 pF max.
- Load capacitance CL (8 - 50)pF or series
- Ageing $\pm 3 \times 10^{-6}$ /year

Environmental

- Electrostatic-Sensitive Device (ESD)
- Storage Temperature Range: (-40 to +125) $^{\circ}$ C
- Mechanical shock: MIL standard 202F, method 213 condition J
- Thermal shock: MIL standard 202F, method 107, condition A
- Vibration: MIL standard 202F, method 204, condition B
- Solderability: 5 seconds maximum at 230 $^{\circ}$ C
- 3 seconds maximum at 350 $^{\circ}$ C

Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status - Compliant

Packaging


- Pack Style: tape and reel: 3000 pieces

Ordering Information

- Crystal model: RFX-11 series
- Crystal Part No.: RFX-11-36.0M30IL[xx]
Where [xx] is the required load
e.g. RFX-11-36.0M30IL30 for 30pF
RFX-11-36.0M30ILS for series

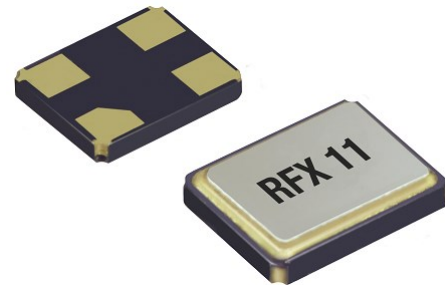

Dimensions (mm)

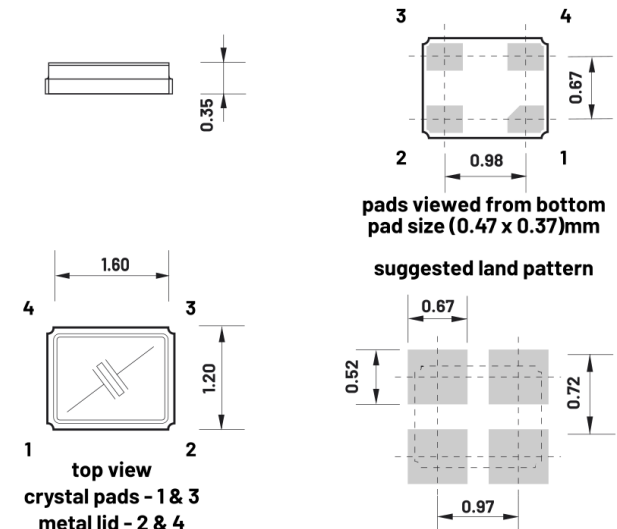

Part number examples by load

Load condition	Part number
10pF	RFX-11-36.0M30IL10
20pF	RFX-11-36.0M30IL20
30pF	RFX-11-36.0M30IL30
Series	RFX-11-36.0M30ILS